

AXIS ARITCO 7000

SPECIFICATIONS

1300 122 868
sales@axislifts.com.au

TECHNICAL DATA


DRIVE SYSTEM	SCREW & NUT
RATED LOAD	250KGS - 500KGS
POWER SUPPLY	SINGLE PHASE 230V 50Hz/9A/16A slow 3 PHASE 230V 50Hz/9A/16A slow 3 PHASE 400V 50Hz/5.2A/16A slow
CONTROL VOLTAGE	24V
NUMBER OF STOPS	UP TO 5 MAX
NUMBER OF DOORS	MAX 2 DOOR PER FLOOR
TRAVEL SPEED	0.3m/sec
MOTOR POWER	3 KW
ENVIRONMENT	INDOOR AND OUTDOOR
CAR SIZE	600mm (W) x 650mm (D) up to 1100mm W x 1400mm D - FOR COMMERCIAL APPLICATIONS
SHAFT DIMENSIONS	VARIOUS SIZES AVAILABLE MIN. COMMERCIAL COMPLIANT SHAFT SIZE IS: 1505mm W X 1630 mm D - CONTACT SALES TEAM FOR FURTHER SHAFT SIZES
OVERHEAD	2300mm MIN
EMERGENCY LOWERING	YES - BATTERY BACKUP

PLEASE CONTACT OUR FRIENDLY SALES TEAM FOR MORE DETAILS

AXIS ARITCO 7000 SPECIFICATIONS

1300 122 868
sales@axislifts.com.au

DRAWINGS

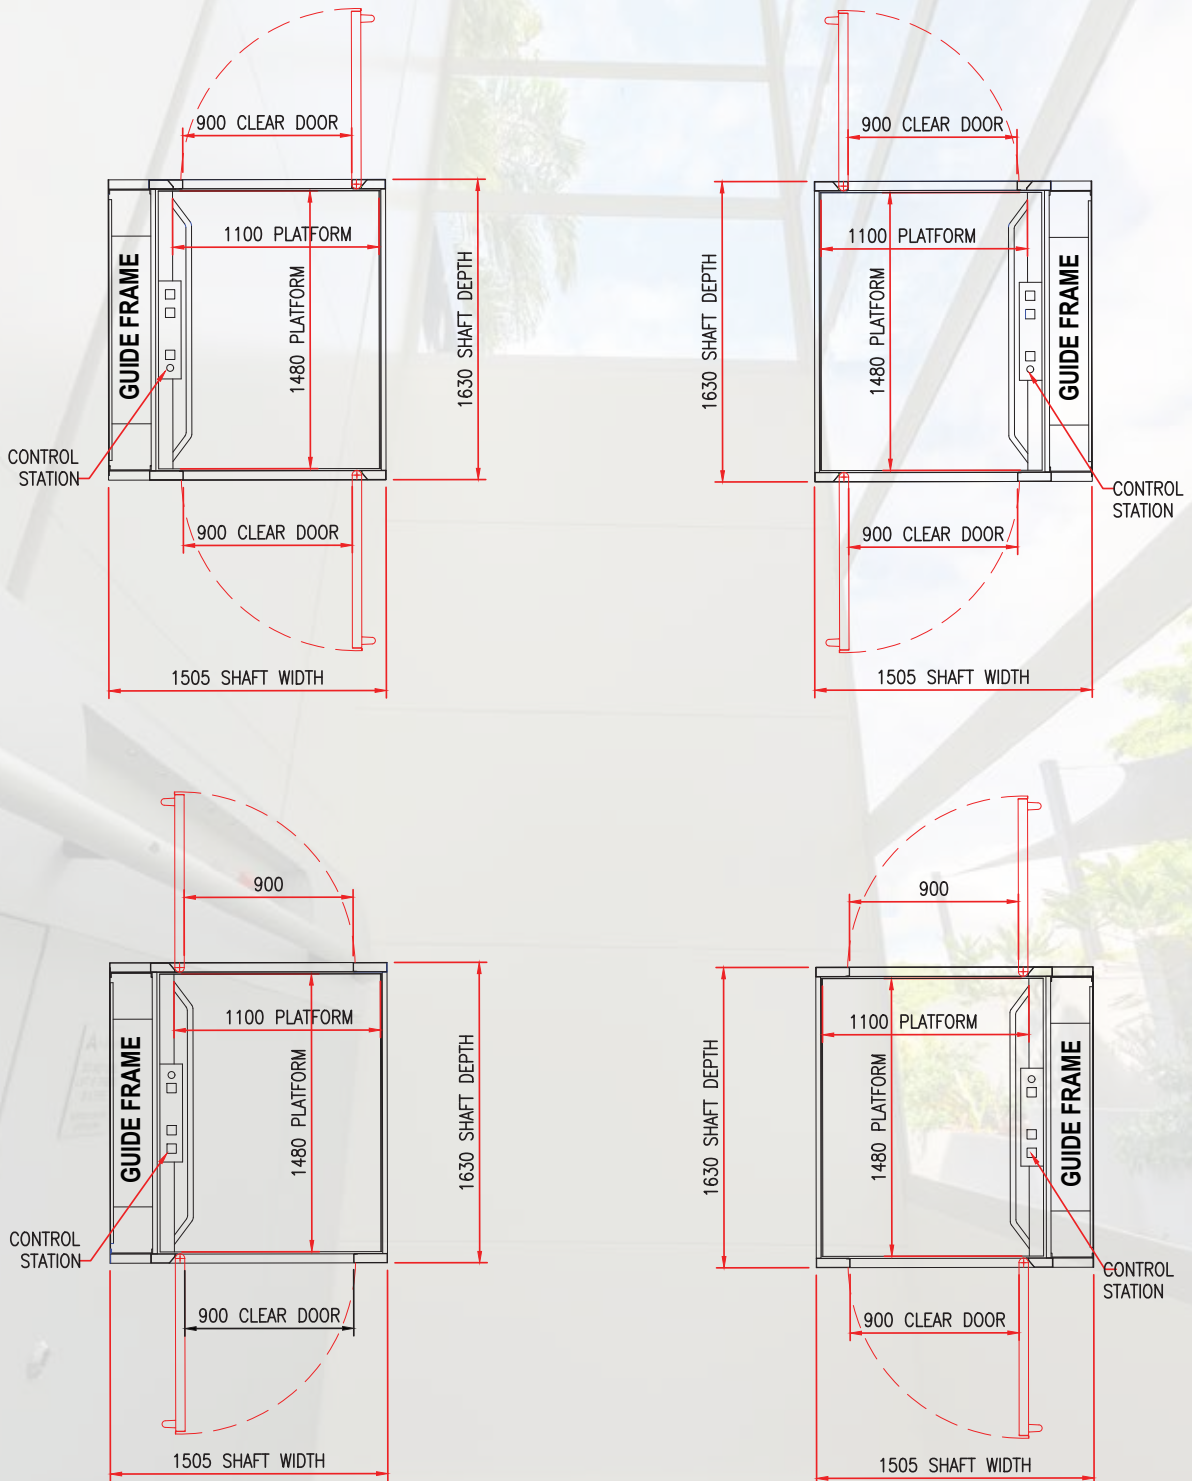

PLEASE CONTACT OUR FRIENDLY SALES TEAM FOR MORE DETAILS