

# AXIS CURVED C6 SPECIFICATIONS



1300 122 868



sales@axislifts.com.au

## SPECIFICATIONS

TECHNICAL DATA	
RATED LOAD	250KGS
POWER SUPPLY	240 VAC SINGLE PHASE OR
BATTERY TYPE	SEALED - MAINTENANCE FREE - THIS GIVES MULTIPLE TRAVELS EVEN IN THE EVENT OF POWER LOSS
TRAVEL SPEED	0,11m/sec
LIFT FINISH	STANDARD LIFT COLOUR = RAL 7035 (OPTION FOR ANY RAL COLOUR) 600mm (W) x 650mm (D)
LIFT RAIL	STANDARD NATURAL ANODIZED ALUMINIUM RAILS ON THE WALL OR ON COLUMNS (OPTION FOR DIFFERENT COLOUR RAILS)
PLATFORM SIZE	1200mm x 810mm
SIDE CLEARANCE REQUIRED	COMMERCIAL APPLICATION = 300mm RESIDENTIAL APPLICATION = 50mm
WIDTH UNFOLDED	1130mm
WIDTH FOLDED UP	395mm
COMPLIANCE	LATEST EUROPEAN STANDARDS AS1735.6


PLEASE CONTACT OUR FRIENDLY SALES TEAM FOR MORE DETAILS

# AXIS CURVED C6 SPECIFICATIONS

☎ 1300 122 868

✉ [sales@axislifts.com.au](mailto:sales@axislifts.com.au)

## DRAWINGS

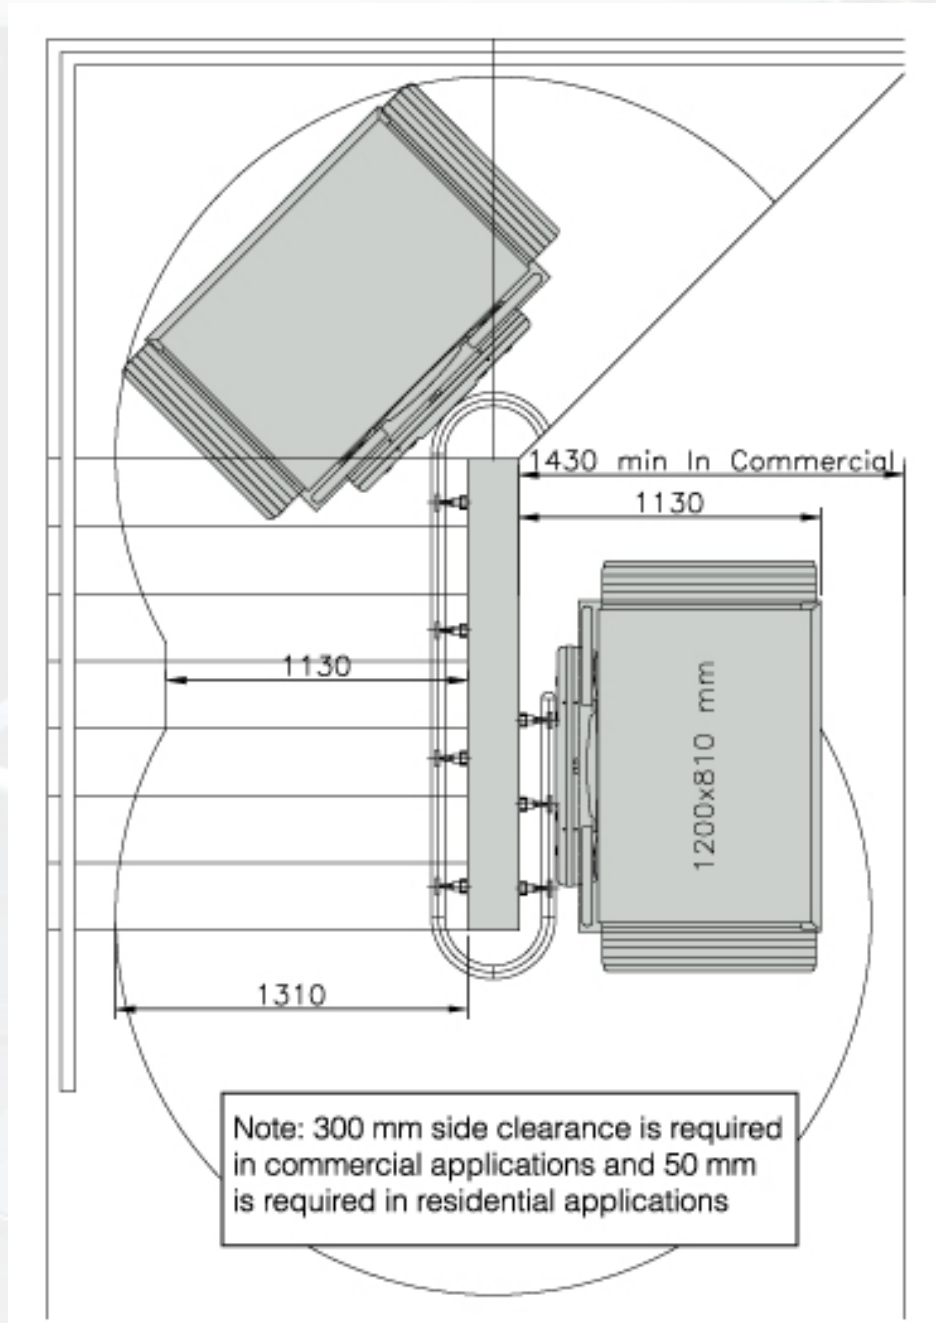

PLEASE CONTACT OUR FRIENDLY SALES TEAM FOR MORE DETAILS