

AXIS MICROFREIGHT SPECIFICATIONS



1300 122 868



sales@axislifts.com.au

SPECIFICATIONS

TECHNICAL DATA	
DRIVE SYSTEM	TRACTION TYPE
RATED LOAD	MICROFREIGHT CLASSIC: 500-750-1000-1500 kg MICROFREIGHT PLUS: 500-750-100-1400 kg
OPERATION	MICROFREIGHT CLASSIC: FULLY AUTOMATIC MICROFREIGHT PLUS: AUTOMATIC - CONSTANT PRESSURE PUSH BUTTON IN THE CAR
STOP	UP TO 8
TRAVEL	UP TO 15 METERS
SPEED	MICROFREIGHT CLASSIC: 0.13 m/s (500 -750-1000kg) - 0.13m/s (1500kg) MICROFREIGHT PLUS: 0.13m/s
POWER SUPPLY	3 PHASE
MOTOR POWER	3 KW

■ OPERATION

THE ELECTRIC OPERATION GUARANTEES OPTIMUM PERFORMANCE AND EXTREMELY LOW NOISE PRODUCTION. MICROPROCESSOR CONTROLLED OPERATION IS A FURTHER GUARANTEE OF PERFORMANCE. A PIT OF 150MM, REDUCED HEADROOM AND STANDARD STRUCTURE SUPPORTED FRAME REDUCE BUILDER'S WORK FOR INSTALLATION TO THE MINIMUM.

■ QUALITY

INTELLIGENT AND MODERN MANAGEMENT, MAXIMUM PRODUCT STANDARDIZATION, HIGHLY AUTOMATED PRODUCTION AND THE ADOPTION OF AVANT-GARDE TECHNOLOGY ENABLE DALDOSS TO GUARANTEE CONSTANT COMPLIANCE TO THE STANDARDS PROVIDED FOR BY EN ISO 9001:2008 COMPANY CERTIFICATION.

■ SAFETY FEATURES

MICROFREIGHT FULLY COMPLIES TO THE MACHINERY DIRECTIVE 2006/42/EC AND OBTAINED THE TYPE EXAMINATION CERTIFICATE RELEASED BY NOTIFIED BODY LIFTINSTITUUT. DALDOSS IS ABLE TO SUPPLY VARIOUS SAFETY EQUIPMENT TO COMPLY WITH DIFFERENT NATIONAL AND INTERNATIONAL STANDARDS AND REGULATIONS.

PLEASE CONTACT OUR FRIENDLY SALES TEAM FOR MORE DETAILS

AXIS MICROFREIGHT SPECIFICATIONS




1300 122 868



sales@axislifts.com.au

MICROFREIGHT DRAWINGS

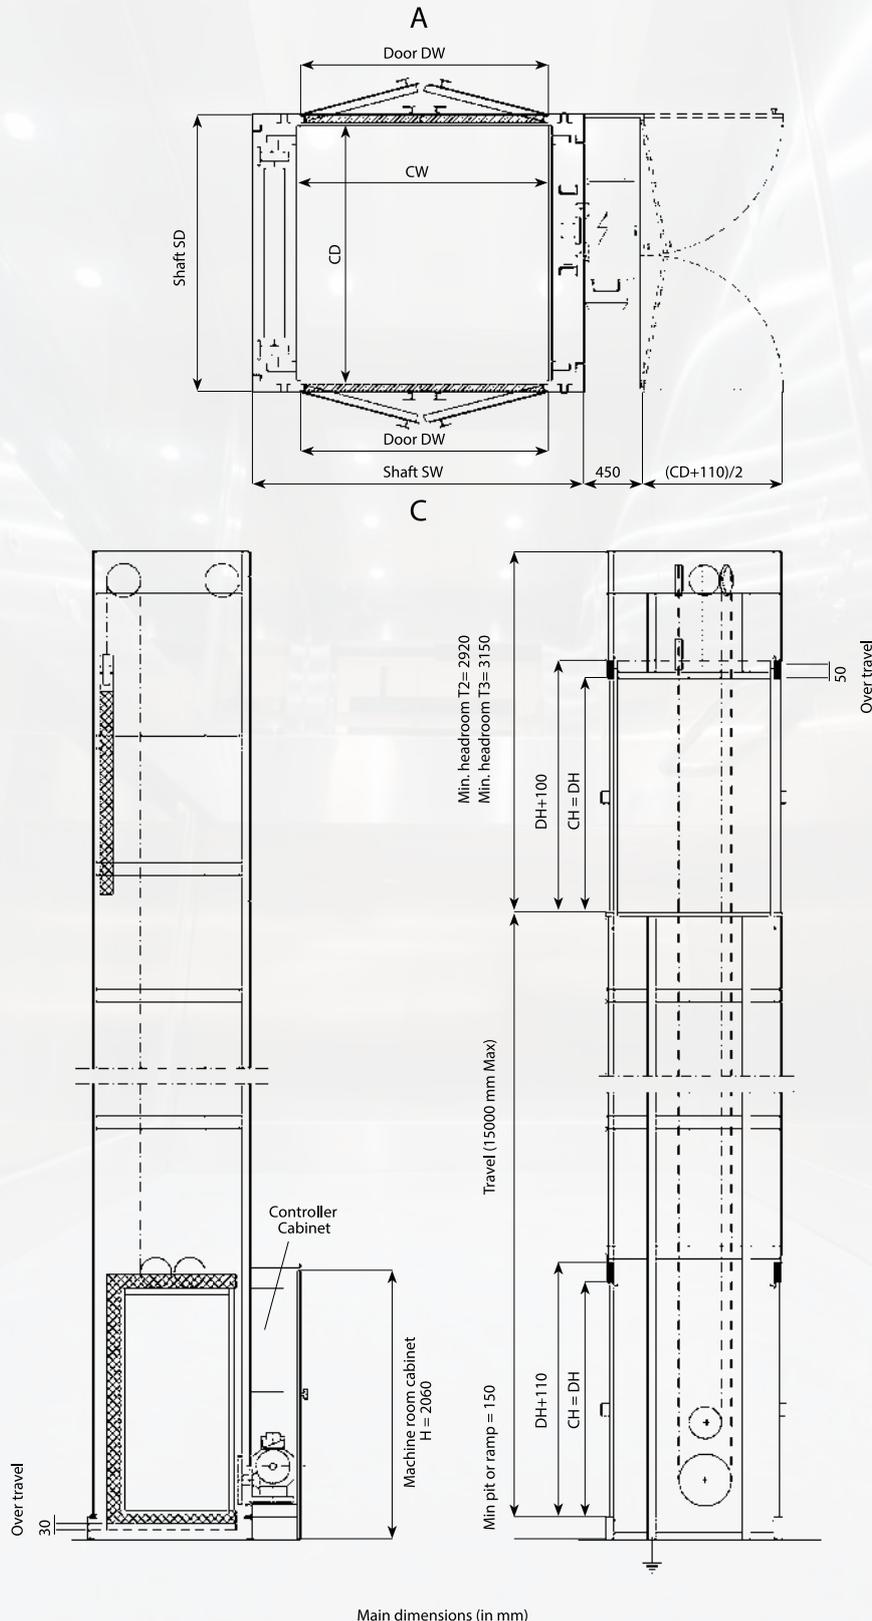

PLEASE CONTACT OUR FRIENDLY SALES TEAM FOR MORE DETAILS

AXIS MICROFREIGHT SPECIFICATIONS



1300 122 868



sales@axislifts.com.au

MICROFREIGHT CLASSIC DIMENSIONS

Model	Rated load	Cabina (mm)				Shaft (mm)		Landing door (mm)	
		CW	CD1A*	CD2A*	CH	SW**	SD	DW***	DH
	Kg								
B	500	1060	1280	1310	2000	1550	1450	1010	2000
B	750	1060	1280	1310	2000	1550	1450	1010	2000
B	1000	1060	1280	1310	2000	1550	1450	1010	2000
EU	500	1360	1280	1310	2000	1850	1450	1310	2000
EU	750	1360	1280	1310	2000	1850	1450	1310	2000
EU	1000	1360	1280	1310	2000	1850	1450	1310	2000
S	750	1060	1780	1810	2000	1550	1950	1010	2000
S	1000	1060	1780	1810	2000	1550	1950	1010	2000
D	1000	1460	1480	1510	2000	1950	1650	1410	2000
D	1500	1460	1480	1510	2000	1950	1650	1410	2000
DS	1000	1460	1780	1810	2000	1950	1950	1410	2000
DS	1500	1460	1780	1810	2000	1950	1950	1410	2000
XDS	750	1460	2180	2210	2000	1950	2350	1410	2000

MICROFREIGHT PLUS DIMENSIONS

Model	Rated load	Cabina (mm)				Shaft (mm)		Landing door (mm)	
		CW	CD1A*	CD2A*	CH	SW**	SD	DW***	DH
B	500	1060	1280	1310	2000	1550	1450	1010	2000
B	750	1060	1280	1310	2000	1550	1450	1010	2000
B	1000	1060	1280	1310	2000	1550	1450	1010	2000
EU	500	1360	1280	1310	2000	1850	1450	1310	2000
EU	750	1360	1280	1310	2000	1850	1450	1310	2000
EU	1000	1360	1280	1310	2000	1850	1450	1310	2000
S	750	1060	1780	1810	2000	1550	1950	1010	2000
S	1000	1060	1780	1810	2000	1550	1950	1010	2000
D	1000	1460	1480	1510	2000	1950	1650	1410	2000
D	1400	1460	1480	1510	2000	1950	1650	1410	2000
DS	1000	1460	1780	1810	2000	1950	1950	1410	2000
DS	1400	1460	1780	1810	2000	1950	1950	1410	2000
XDS	750	1460	2180	2210	2000	1950	2350	1410	2000

PLEASE CONTACT OUR FRIENDLY SALES TEAM FOR MORE DETAILS