

AXIS PART 16

SPECIFICATIONS



1300 122 868



sales@axislifts.com.au

TECHNICAL DATA

DRIVE SYSTEM	BOTH HYDRAULIC AND MRL TRACTION AVAILABLE
RATED LOAD	385KGS - 400KGS & 630KGS
POWER SUPPLY	240 VAC SINGLE PHASE OR 415 VAC THREE PHASE
CONTROL VOLTAGE	24V
NUMBER OF STOPS	UP TO 5 MAX - 12000mm VERTICAL TRAVEL
NUMBER OF DOORS	MAX 2 DOOR PER FLOOR
TRAVEL SPEED	0.3m/sec
MOTOR POWER	4.5KW
ENVIRONMENT	INDOOR AND OUTDOOR
CAR SIZE	1100mm x 1400mm
SHAFT DIMENSIONS	SINGLE ENTRY 1570mm W x 1750mm D THRU CAR 1570mm W x 1920mm D
OVERHEAD	2700mm
PIT	160mm PIT WITH STANDARD FLOORING 180mm FOR TILES OR GRANITE
COMPLIANCE	LATEST EUROPEAN STANDARDS AS1735.16
EMERGENCY LOWERING	EMERGENCY UPS WILL AUTOMATICALLY LOWER LIFT IN THE EVENT OF POWER FAILURE


AXIS PART 16 SPECIFICATIONS

☎ 1300 122 868

✉ sales@axislifts.com.au

DRAWINGS

SINGLE ENTRY SHAFT PLAN

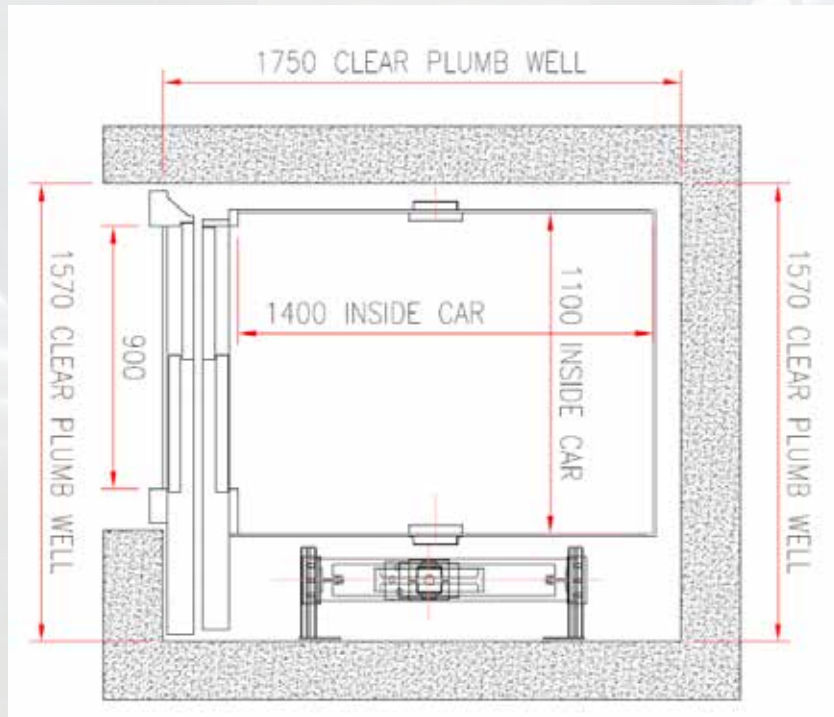

THRU CAR SHAFT PLAN

