

AXIS PART 18 SPECIFICATIONS



1300 122 868



sales@axislifts.com.au

SPECIFICATIONS


TECHNICAL DATA	
DRIVE SYSTEM	HYDRAULIC - OR TRACTION
COMPLIANCE	AS1735.18
RATED LOAD	250KGS - 630KGS
POWER SUPPLY	240 VAC SINGLE PHASE OR 415 VAC THREE PHASE
CONTROL VOLTAGE	24V
NUMBER OF STOPS	UP TO 5 MAX
NUMBER OF DOORS	MAX 2 DOOR PER FLOOR
TRAVEL SPEED	0.3m/sec
MOTOR POWER	4.5KW
ENVIRONMENT	INDOOR AND OUTDOOR
CAR SIZE	600mm (W) x 650mm (D) up to 1100mm W x 1400mm D
SHAFT DIMENSIONS	VARIABLE DEPENDENT UPON CAR SIZE SINGLE ENTRY BASED ON 1100mm W 1400mm CAR 1570 W x 1750 D THRU CAR ENTRY BASED ON 1100mm W 1400mm CAR 1570 W x 1890 D
EMERGENCY LOWERING	EMERGENCY UPS WILL AUTOMATICALLY LOWER LIFT IN THE EVENT OF POWER FAILURE
OVERHEAD	2650mm (MIN SLIDING DOOR OPTION)

PLEASE CONTACT OUR FRIENDLY SALES TEAM FOR MORE DETAILS

AXIS PART 18 SPECIFICATIONS

1300 122 868
sales@axislifts.com.au

DRAWINGS

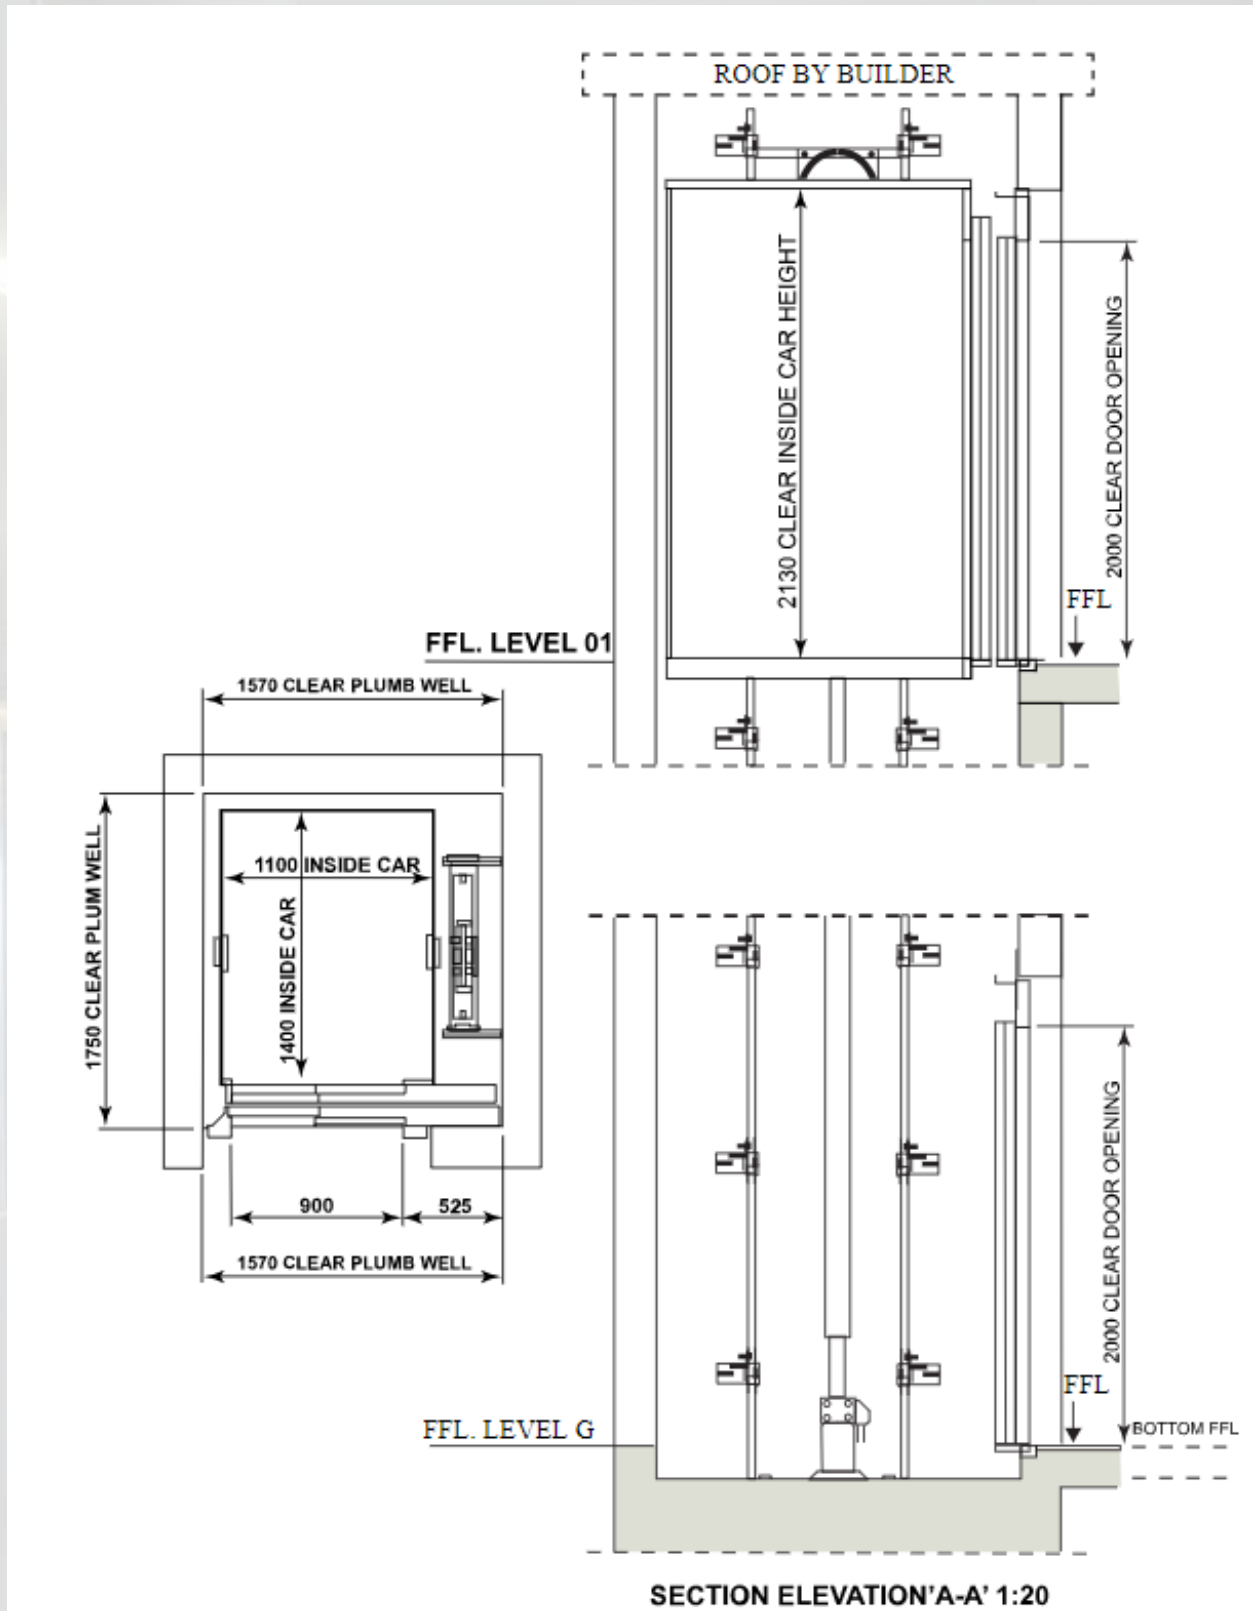

PLEASE CONTACT OUR FRIENDLY SALES TEAM FOR MORE DETAILS